D-Tech
connecting you
to technology

serveIT™ g-Series self-service system

serveIT™ g–Series
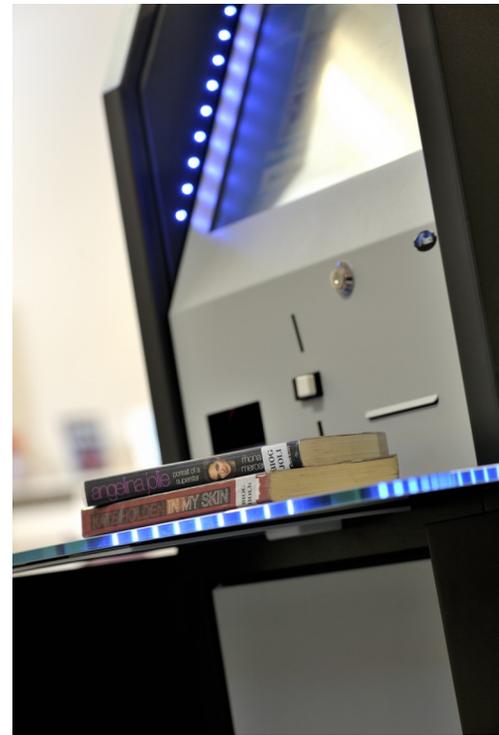## self-service system

● ● ● ● ● ● ● ● ●

D-Tech's serveIT™ g-Series is available as a standalone or desktop option. The RFID element provides enhanced protection and throughput where required.

Packaged in a durable powder coated steel body with a sapphire shielded glass plate with attractive styling. Bespoke options are available and the units are available in a range of colours. Surround screen LCD lighting interacts with the software. With it's aesthetic design the serveIT™ g-Series is an obvious choice for any library.

Features:

- Styled to meet ergonomic guidelines.

- Compatible with D-Tech 13.56 MHz RFID labels and items tagged with approved labels from book suppliers including multi vendor reading (MVR). Allowing reading of other RFID labels.

- D-Tech's advanced digital RFID technology uses state of the art, digitally enhanced software to chip technology to ensure superior reading and writing of labels.

- Integrated barcode scanning as standard with the choice of adding biometrics and or Mifare/smart cards for borrower ID.

- Software supports multi item issue, returns and re-new functions, together with a choice of payment functions from coins, notes, change, e-purse and chip & pin.

- Integrated printer included with offline mode, statistics, cash audit, AdminTool network access to change or configure the installed system as standard provision.

Contact us...

T: (01394)420077

E: info@d-techdirect.com

W: www.d-techdirect.com

Building 136
Bentwaters Parks
Rendlesham
Woodbridge
Suffolk
IP12 2TW

serveIT™ g-Series self-service system

serveIT™ g–Series
self-service system

⬤ ⬤ ⬤ ⬤ ⬤ ⬤ ⬤ ⬤ ◯

Specifications:

serveIT ™ g-Series

Height	1200mm
Width	850mm
Depth	600mm
Weight	70kg

Materials:
Standard finish is powder coated steel . Alternative RAL colours can be requested at an additional cost.
Sapphire tinted and shielded glass for the reading shelf which is set at a DDA compliant height of 720mm.

Power Supply:
220/240 Vac

Electronics:
MR101 (Feig) USB connection to touch screen PC (19'')

Reading performance:

Label	Ring	Video	CD	DVD	Book
20cm	30cm	25cm	25cm	30cm	

Installation Requirements:

- One double switched socket outlet 450mm from floor level.
- One single IP addressed network point same adjacent to above power outlet.

AFI/EAS
Recommended AFI mode supported for security switching but EAS bit is also supported.

Contact us...

T: (01394)420077

E: info@d-techdirect.com

W: www.d-techdirect.com